

Downstroke Baler (Vertical Baler)

This equipment
conforms to all ANSI
245.5 Safety Standards

CompactorMC.com



The baler is made from brand components and is designed to provide maximum compaction throughout its life-cycle.

Rental and leasing programs offered!



Please Recycle

Made in the US

Downstroke Baler (Vertical Baler)


Optional Features

220 VAC Single Phase
 Interlock system "OK" light
 Automatic bale ejector
 Wire feed guides

"Bale Made" light
 Oil heater
 Galvanized bale ties
 Weather cover for panel box

Technical Specifications

Model	VB-48	VB-60	VB-72
Bale Size: L	48"	60"	72"
W	30"	30"	30"
H	48"	48"	48"
Bale Weight	700-825 lbs	800-1,000 lbs	950-1,200 lbs
Cylinder Bore	6"	6"	6"
Stroke	44"	44"	44"
Motor - HP	10 hp	10 hp	10 hp
Operating Pressure	2,000 psi	2,000 psi	2,000 psi
Platen Force	56,000 lbs	56,000 lbs	56,000 lbs
Cycle Time	55 sec.	55 sec.	55 sec.
Feed Opening	28"	28"	28"
Unit Weight	4,695 lbs	4,885 lbs	5,074 lbs

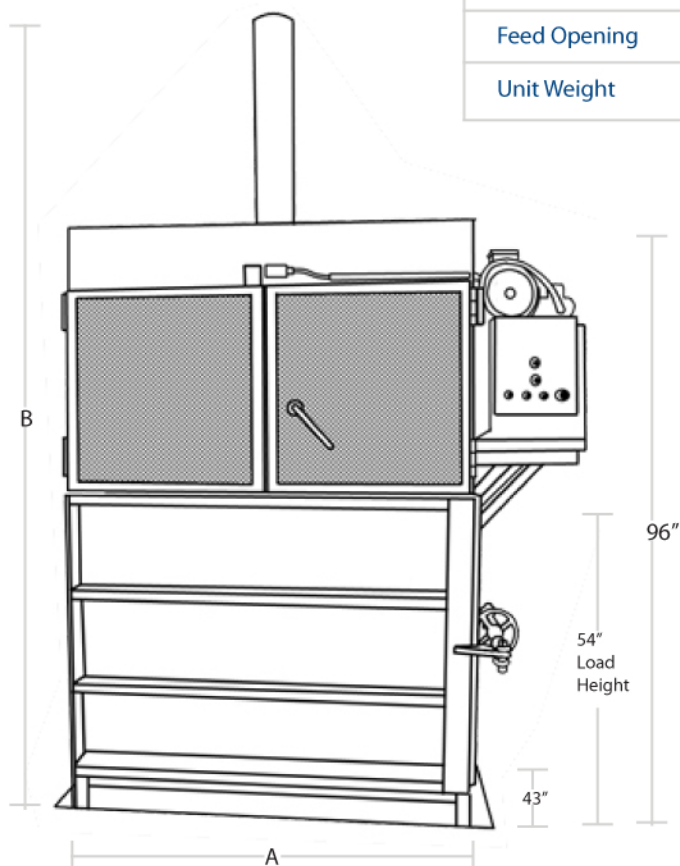

	Dimensions	VB-48	VB-60	VB-72
A	Width	72"	84"	96"
B	Height (maximum)	135"	135"	135"
	Depth (w/ door open)	94"	106"	118"

Additional Specs

3/60-230/460 Voltage 3ph
 UL Listed
 Choice of Control Panel Mounting
 Choice of Bale Chamber Door
 Hinge Side
 Heavy-Duty Structure

Safety

This equipment conforms to all
 ANSI 245.5 Safety Standards